

GENERAL NOTES:

1) PEARL (#750) FRP INTERIOR & EXTERIOR WALL SURFACE.

2) ALUMINUM FRAMING EXTRUSIONS HAVE A MILL FINISH.

3) ALL WINDOWS, INCLUDING DOORS HAVE CLEAR TEMPERED GLASS.

4) UNIT INCLUDES FACTORY INSTALLED INTEGRAL ROOF.


5) INTERIOR CLEAR HEIGHT (FLOOR-TO-CEILING) IS 82 5/8".

6) OVERALL EXTERIOR HEIGHT IS 91".


7) FINISHED FLOORING TO BE GRAY 1/2" HDPE LAMINATED OSB PANEL.

8) THE 2x4 SUPPORT BOARDS ATTACHED TO THE UNDERSIDE OF THE BLDG. ARE USED FOR SHIPPING PURPOSES ONLY AND NEED TO BE REMOVED AT INSTALLATION.

9) REQUIREMENT ARE USUALLY DICTATED BY LOCAL CODES, BUT IT IS RECOMMENDED THAT PORTAFAB PRE-ASSEMBLED BUILDINGS BE INSTALLED ON A CONCRETE SLAB NO LESS THAN 4" IN THICKNESS AND 6" WIDER THAN THE OUT-TO-OUT DIMENSIONS ON ALL FOUR SIDES FOR ANCHORING. SEE CONSTRUCTION DETAIL SHEET FOR ANCHORS.

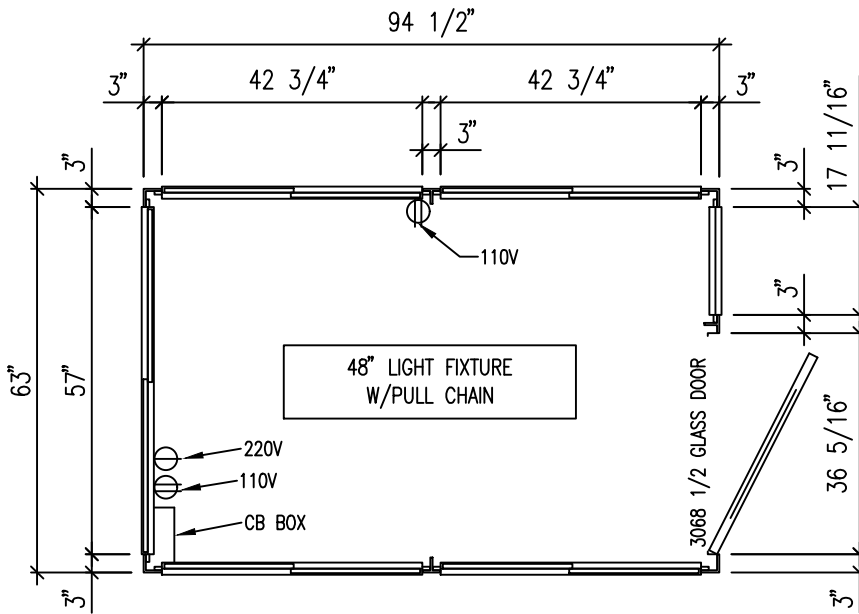

FLOOR PLAN

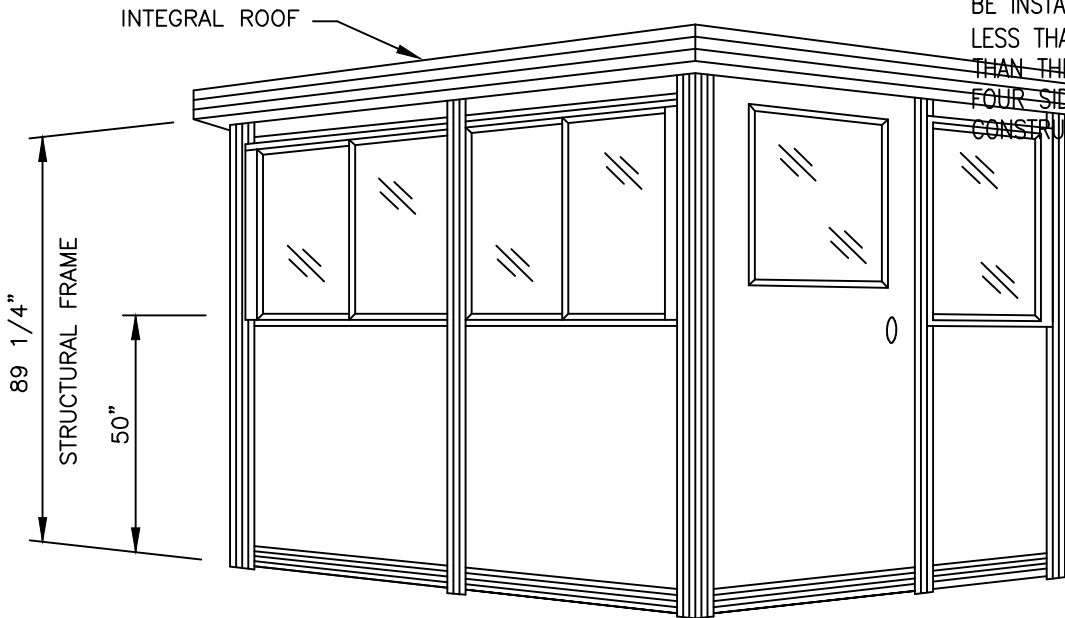

MODEL 58

MODEL 58
PRE ASSEMBLED

**PORTA-FAB
CORPORATION**

P.O. BOX 1084 CHESTERFIELD, MO. 63006-1084

JOB: PAB58

SCALE

N/A

DATE

DRAWN BY

CD

REVISED

CHECKED

SHEET NO. 1 OF 1

These documents were developed by PORTA-FAB Corporation. The contents of these documents are the proprietary property of PORTA-FAB Corporation. They are not to be copied or otherwise used without the express written permission of PORTA-FAB Corporation. Copyright 2003 PORTA-FAB Corp.